

Lecture No.9

Irrigation system used in greenhouses-rules of watering, hand watering, perimeter watering, overhead sprinklers, boom watering and drip irrigation.

A well-designed irrigation system will supply the precise amount of water needed each day throughout the year. The quantity of water needed would depend on the growing area, the crop, weather conditions, the time of year and whether the heating or ventilation system is operating. Water needs are also dependent on the type of soil or soil mix and the size and type of the container or bed. Watering in the green house most frequently accounts for loss in crop quality. Though the operation appears to be the simple, proper decision should be taken on how, when and what quantity to be given to the plants after continuous inspection and assessment .Since under watering (less frequent) and over watering (more frequent) will be injurious to the crops, the rules of watering should be strictly adhered to. Several irrigation water application systems, such as hand writing, perimeter watering, overhead sprinklers, boom watering and drip irrigation, over sprinklers, boom watering and drip irrigation which are currently in use.

9.1 Rules of Watering

The following are the important rules of application of irrigation.

Rule 1: Use a well drained substrate with good structure

If the root substrate is not well drained and aerated, proper watering can not be achieved. Hence substrates with ample moisture retention along with good aeration are indispensable for proper growth of the plants. The desired combination of coarse texture and highly stable structure can be obtained from the formulated substrates and not from field soil alone.

Rule 2: Water thoroughly each time

Partial watering of the substrates should be avoided; the supplied water should flow from the bottom in case of containers, and the root zone is wetted thoroughly in case of beds. As a rule, 10 to 15% excess of water is supplied. In general, the water requirement for soil based substrates is at a rate of 20 l/m² of bench, 0.3 to 0.35 litres per 16.5 cm diameter pot.

Rule 3: Water just before initial moisture stress occurs

Since over watering reduces the aeration and root development, water should be applied just before the plant enters the early symptoms of water stress. The foliar symptoms, such as texture, colour and turbidity can be used to determine the moisture stress, but vary with crops. For crops that do not show any symptoms, colour, feel and weight of the substrates are used for assessment.

9.2 Hand watering


The most traditional method of irrigation is hand watering and in present days is uneconomical. Growers can afford hand watering only where a crop is still at a high density, such as in seed beds, or when they are watered at a few selected pots or areas that have dried sooner than others. In all cases, the labour saved will pay for the automatic system in less than one year. It soon will become apparent that this cost is too high. In addition to this deterrent to hand watering, there is

great risk of applying too little water or of waiting too long between waterings. Hand watering requires considerable time and is very boring. It is usually performed by inexperienced employees, who may be tempted to speed up the job or put it off to another time. Automatic watering is rapid and easy and is performed by the grower it self. Where hand watering is practiced, a water breaker should be used on the end of the hose. Such a device breaks the force of the water, permitting a higher flow rate without washing the root substrate out of the bench or pot. It also lessens the risk of disrupting the structure of the substrate surface.

9.3 Perimeter watering

Perimeter watering system can be used for crop production in benches or beds. A typical system consists of a plastic pipe around the perimeter of a bench with nozzles that spray water over the substrate surface below the foliage (Fig.14).

Either polythene or PVC pipe can be used. While PVC pipe has the advantage of being very stationary, polythene pipe tends to roll if it is not anchored firmly to the side of the bench. This causes nozzles to rise or fall from proper orientation to the substrate surface. Nozzles are made of nylon or a hard plastic and are available to put out a spray are of 180°, 90° or 45°. Regardless of the types of nozzles used, they are staggered across the benches so that each nozzle projects out between two other nozzles on the opposite side. Perimeter watering systems with 180° nozzles require one water valve for benches up to 30.5 m in length.

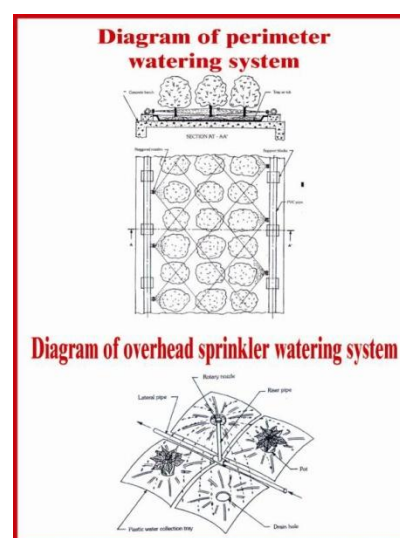

9.4 Overhead sprinklers

While the foliage on the majority of crops should be kept dry for disease control purposes, a few crops do tolerate wet foliage. These few crops can most easily and cheaply be irrigated from overhead. Bedding plants, azalea liners, and some green plants are crops commonly watered from overhead. A pipe is installed along the middle of a bed. Riser pipes are installed periodically to a height well above the final height of the crop (Fig.14). A total height of 0.6 m is sufficient for bedding plants flats and 1.8 m for fresh flowers. A nozzle is installed at the top of each riser. Nozzles vary from those that throw a 360° pattern continuously to types that rotate around a 360° circle. Trays are sometimes placed under pots to collect water that would otherwise fall on the ground between pots and wasted. Each tray is square and meets the adjacent tray. In this way nearly all water is intercepted. Each tray has a depression to accommodate the pot and is then angled upward from the pot toward the tray perimeter. The trays also have drain holes, which allow drainage of excess water and store certain quantity, which is subsequently absorbed by the substrate.

9.5 Boom watering

Boom watering can function either as open or a closed system, and is used often for the production of seedlings grown in plug trays. Plug trays are plastic trays that have width and length dimensions of approximately 30 × 61 cm, a depth of 13 to 38 mm, and contain about 100

to 800 cells. Each seedling grown in its own individual cell. Precision of watering is extremely important during the 2 to 8 week production time of plug seedlings.

A boom watering system generally consists of a water pipe boom that extends from one side of a greenhouse bay to the other. The pipe is fitted with nozzles that can spray either water or fertilizer solution down onto the crop. The boom is attached at its center point to a carriage that rides along rails, often suspended above the centre walk of the greenhouse bay. In this way, the boom can pass from one end of the bay to the other. The boom is propelled by an electric motor. The quantity of water delivered per unit area of plants is adjusted by the speed at which the boom travels.

9.6 Drip Irrigation

Drip irrigation, often referred to as trickle irrigation, consists of laying plastic tubes of small diameter on the surface or subsurface of the field or greenhouse beside or beneath the plants. Water is delivered to the plants at frequent intervals through small holes or emitters located along the tube. Drip irrigation systems are commonly used in combination with protected

agriculture, as an integral and essential part of the comprehensive design. When using plastic mulches, row covers, or greenhouses, drip irrigation is the only means of applying uniform water and fertilizer to the plants. Drip irrigation provides maximum control over environment variability; it assures optimum production with minimal use of water, while conserving soil and fertilizer nutrients; and controls

water, fertilizer, labour and machinery costs. Drip irrigation is the best means of water conservation. In general, the application efficiency is 90 to 95%, compared with sprinkler at 70% and furrow irrigation at 60 to 80%, depending on soil type, level of field and how water is applied to the furrows. Drip irrigation is not only recommended for protected agriculture but also for open field crop production, especially in arid and semi-arid regions of the world. One of the disadvantages of drip irrigation is the initial cost of equipment per acre, which may be higher than other systems of irrigation. However, these costs must be evaluated through comparison with the expense of land preparation and maintenance often

required by surface irrigation. Basic equipment for irrigation consists of a pump, a main line, delivery pipes, manifold, and drip tape laterals or emitters as shown in figure 15:

The head, between the pump and the pipeline network, usually consists of control valves, couplings, filters, time clocks, fertilizer injectors, pressure regulators, flow meters, and gauges. Since the water passes through very small outlets in emitters, it is an absolute necessity that it should be screened, filtered, or both, before it is distributed in the pipe system. The initial field positioning and layout of a drip system is influenced by the topography of the land and the cost of various system configurations.

